STARK
STRONGLY CHOSEN
SINCE 1980

STARK SSB BUCKET SPREADERS

ANTI-SKID TREATMENT

ROBUST AND PRECISE BUCKET SPREADER

- **Large volumes, the best useful width on the market and easy maintenance enable cost effective anti-slip treatment.**
- **Efficient and precise work tool for spreading sand, gravel and salt.**
- **Strong structure and high-quality components guarantee the product's longevity.**



- The spiral pattern of the spreading roller and stepless hydraulic rotation speed adjustment. Enable precise spreading, saving working time and sanding material.
- The brush strip of the sanding roller cleans and supports the sanding rubber, keeping it tight. This allows the gap to be widened, allowing large individual stones to pass through and not jam the roller.
- Greasing the bearings and greasing and adjusting the chain can be done easily, quickly and safely without opening the guards.
- The inclination angle of the fitting surface improves the filling of the sanding bucket, allowing the bucket to be filled to a heap load.
- The bolt-on STARK FIT fitting can be quickly replaced according to the quick coupling of the base machine.
- The STARK SSB sanding bucket can be used on basic machines of 3-25 tons, suitable for spreading sand and gravel with a grain size of 0-16 mm.





STANDARD EQUIPMENT

- Lip plate made of wear-resistant steel (500 HB)
- Crusher shaft
- Protective grilles
- Dual pressure safety valve, flow control valve
- Warning label, reflectors


ACCESSORIES


- Filling cylinder


STARK FIT

PRECISE SPREAD

TECHNICAL DRAWINGS

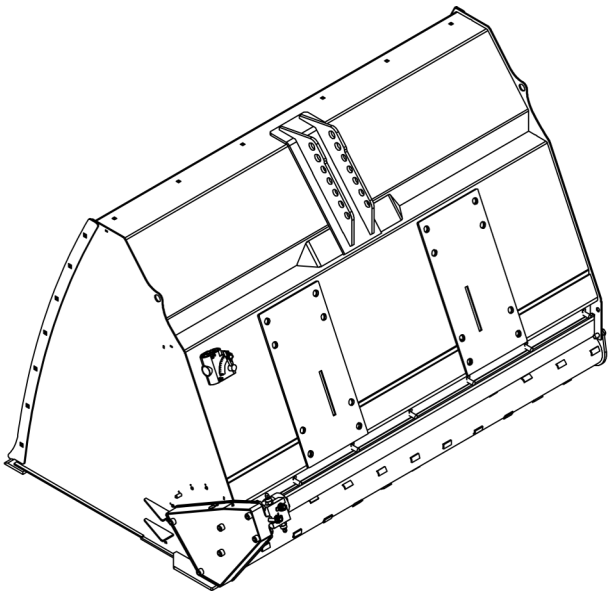

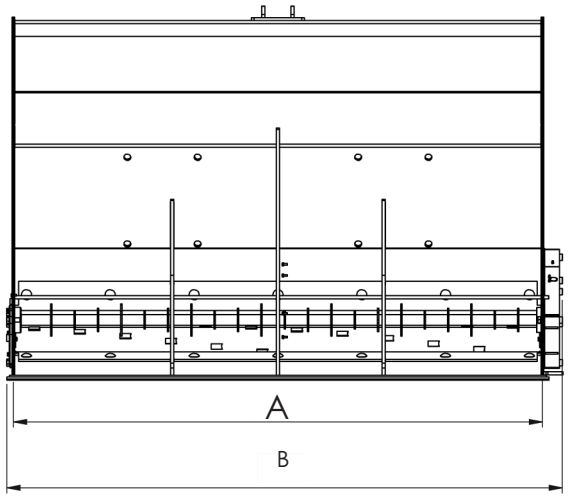

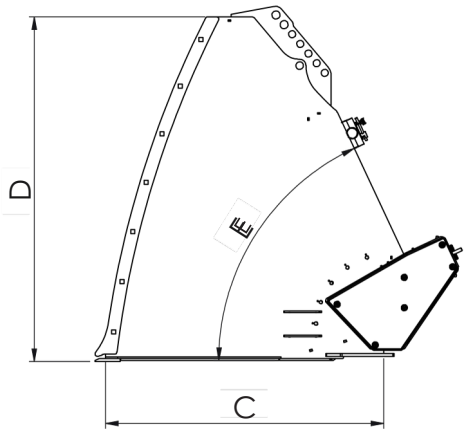

TECHNICAL DIMENSIONS

Product	Working width (mm)	Max. width (mm)	Depth (mm)	Height (mm)	Adapters angle (°)	SAE volyme (m^3)	Weight (kg)*
	A	B	C	D	E		
SSB 800	1790	1870	750	855	25	0,80	415
SSB 950	1790	1870	750	915	25	0,95	435
SSB 1200	2090	2180	950	985	25	1,20	510
SSB 1600	2090	2180	950	1115	25	1,60	530
SSB 2300	2090	2180	1220	1355	25	2,30	700
SSB 2700	2090	2180	1220	1485	25	2,70	755
SSB 3300	2490	2580	1470	1415	25	3,30	1050
SSB 3900	2490	2580	1470	1510	25	3,90	1100

* Weight includes blades and fittings. Weight depends on the fitting type / plow accessories.

2026•1 Lametal Oy reserves the right to change equipment levels, prices and technical solutions at any time without obligation and without prior notice.