STARK
STRONGLY CHOSEN
SINCE 1980

STARK WB WING BUCKET

SNOW CLEARING

THE PERFECT TOOL FOR PLOWING AND LOADING



- **Wing buckets are suitable for 6–15 ton machines and offer a working width of 4–5.7 meters.**
- **Wide movement ranges enable quick bucket filling and emptying.**

- The wing's 180 mm vertical float allows for split-level plowing.
- The 145-degree movement range of the wings enables plowing right next to walls.
- The wing's high flexibility improves removal of the hard ridge of snow on road and allows for greater bucket tilt.
- HD blades are designed to withstand wear, and their thinned mounting holes extend blade life.
- The quick bolt-on STARK FIT adapter allows for fast changes according to the base machine's quick coupler.

Technical features:

- **SLW flexible wings** ensure optimal wing compliance with surface shapes and efficient hard snow removal.
- **Additional side plates** improve the visibility of the work tool and increase loading capacity.
- **Diagonal valve** (optional) enables simultaneous wing operation for enhanced snow management.

STANDARD EQUIPMENT





- SLW (Spring Loaded Wings)
- Wear-resistant steel lip plate 500 HB
- Standard hole spacing (305 mm)
- Warning striping
- Reflectors


OPTIONAL EQUIPMENT

- Bolt-on flat or perforated blades
- Radio control, 3 control signals
- Wireless controller + wiring harness 12/24V
- Diagonal valve

SLW

STARK FIT

TECHNICAL DRAWINGS

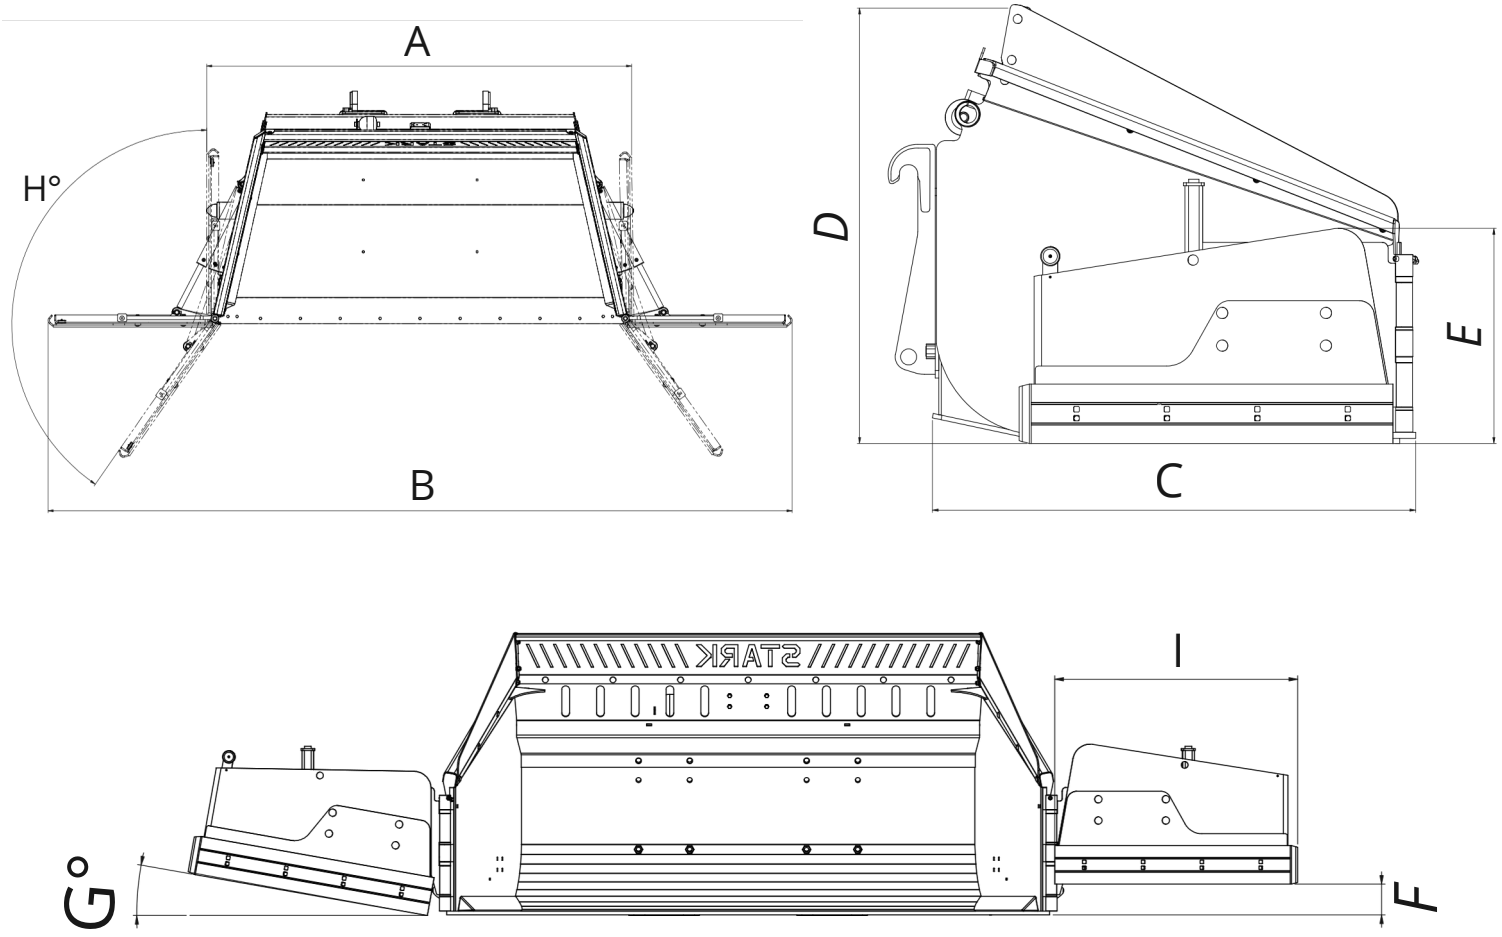

TECHNICAL DIMENSIONS

Product	Bucket width (mm)	Max. working width (mm)	Depth (mm)	Height (mm)	Wing height (mm)	Wing float height (mm)	Wing tilt angle ± (°)	Wing rotation angle ± (°)	Wing width (mm)	SAE capacity (m^3)	Weight (kg)**
	A	B	C	D	E	F	G	H	I		
WB 2150/4000	2150	4000	1120	1000	680	180	10	10	930	1,4	625
WB 2800/4600	2800	4600	1400	1180	680	180	10	10	930	3,1	950
WB 2800/5200	2800	5200	1400	1180	680	180	10	10	1250	3,1	1000
WB 2950/5400	2960	5400	1470	1480	680	180	10	10	1250	4,2	1350
WB 3300/5700	3260	5700	1640	1490	680	180	10	10	1250	5,2	1460

** **Weight including adapter and blades.**

2026•2 ametal Oy reserves the full rights to change at any time without ogligation providing equipment , prices and technical solutions , without prior notice.