STARK
STRONGLY CHOSEN
SINCE 1980

STARK CC CHAIN CRUSHER

ROADSIDE MAINTENANCE



STRONG AND DURABLE CHAIN-CRUSHER

- A piston motor ensuring high chain speed enables high work speed and excellent crushing results.
- The high, well-designed case effectively draws in the material to be crushed.
- The widely opening hydraulic front hatch enhances the clearing of dense and thick undergrowth.
- Chain options:
  - 10 mm – mowing
  - 13 mm – general use
  - 16 mm – brush crushing
- Efficient chain crushing: At a chain rotation speed of 1300–1500 rpm, excellent crushing performance is achieved.
- The robust Hardox-steel frame withstands heavy wear.

SAFETY:


- In case of a collision, the cutting head's safety device retracts backward and upward.
- PUR side and rear guards allow controlled discharge of debris.
- The front hatch guard and internal frame guard reduce debris ejection.









TECHNICAL DRAWINGS

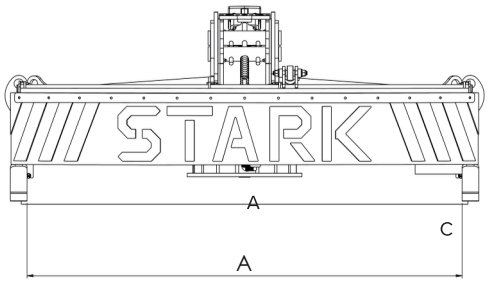

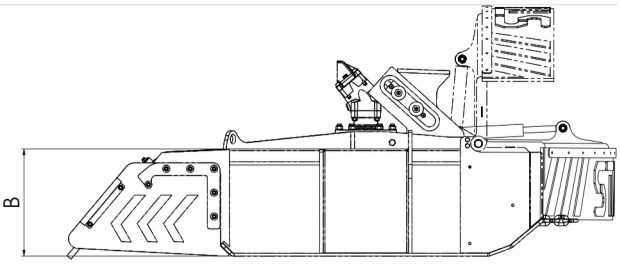

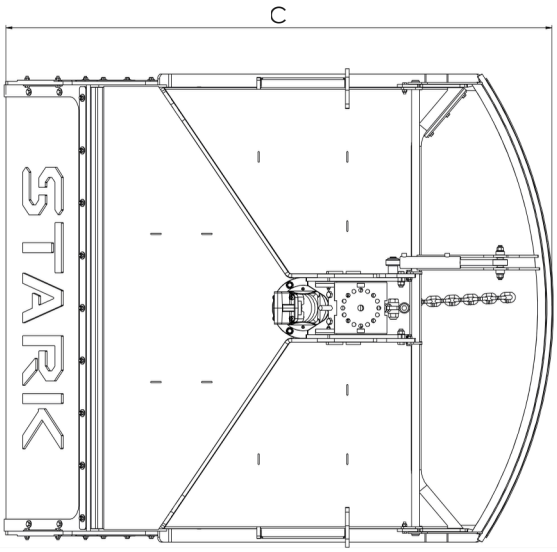

TECHNICAL DIMENSIONS

Product	Working width (mm)	Height (mm)	Length (mm)	Hydraulic motor (cm^3)	Max. pressure (bar)	Weight (kg)	Oil requirement (l/min)
	A	B	C				
CC 1800	1800	520	2300	84	250	600	100-120
CC 2200	2200	520	2700	105	250	700	120-150

2026•4 ametal Oy reserves the full rights to change at any time without ogligation providing equipment , prices and technical solutions , without prior notice.