STARK
STRONGLY CHOSEN
SINCE 1980

STARK ROAD DRAG RD 4.5 & RD 6

LEVELING

- **Excellent tool for road shaping, as well as removing potholes and edge slabs.**
- **A strong structure and high-quality components ensure worry-free grading kilometers.**



- The Stark RD 4.5 & RD 6 road drags are extremely easy to use.
- Sufficient weight for efficient road maintenance.
- The heavy-duty wheel pack compacts the graded surface.
- Patented wheel pack turning mechanism enhances usability and safety. Thanks to the patented wheel pack turning mechanism, the road drag can operate in "crab steering" mode, ensuring it does not straighten out in curves.
- Optimal blade angles guarantee an excellent finish and significantly reduce fuel consumption.
- Designed for year-round use. The blade can be turned to remove ruts. Blade is secured with bolt fastenings.

STANDARD EQUIPMENT

- Heavy-duty wheel pack with patented rotation mechanism
- Mechanical center blade rotation for rut removal
- Plastic mudguard
- Hydraulic height adjustment tilt and blade engagement control
- Gravel spreader with large support wheels
- Lights
- Inclinometer
- Toolbox
- Gravel spreader leveling blades
- 1 additional hydraulic block




OPTIONAL EQUIPMENT

- Spike tooth equipment
- Side wing 1800 mm (RD 6)
- Side wing 1220 mm (RD 4.5)
- Slab cutter
- Hydraulic extension for gravel spreader
- Hydraulics for support wheels
- Wireless control unit
- Additional hydraulic blocks

CRAB STEERING

TECHNICAL DRAWINGS

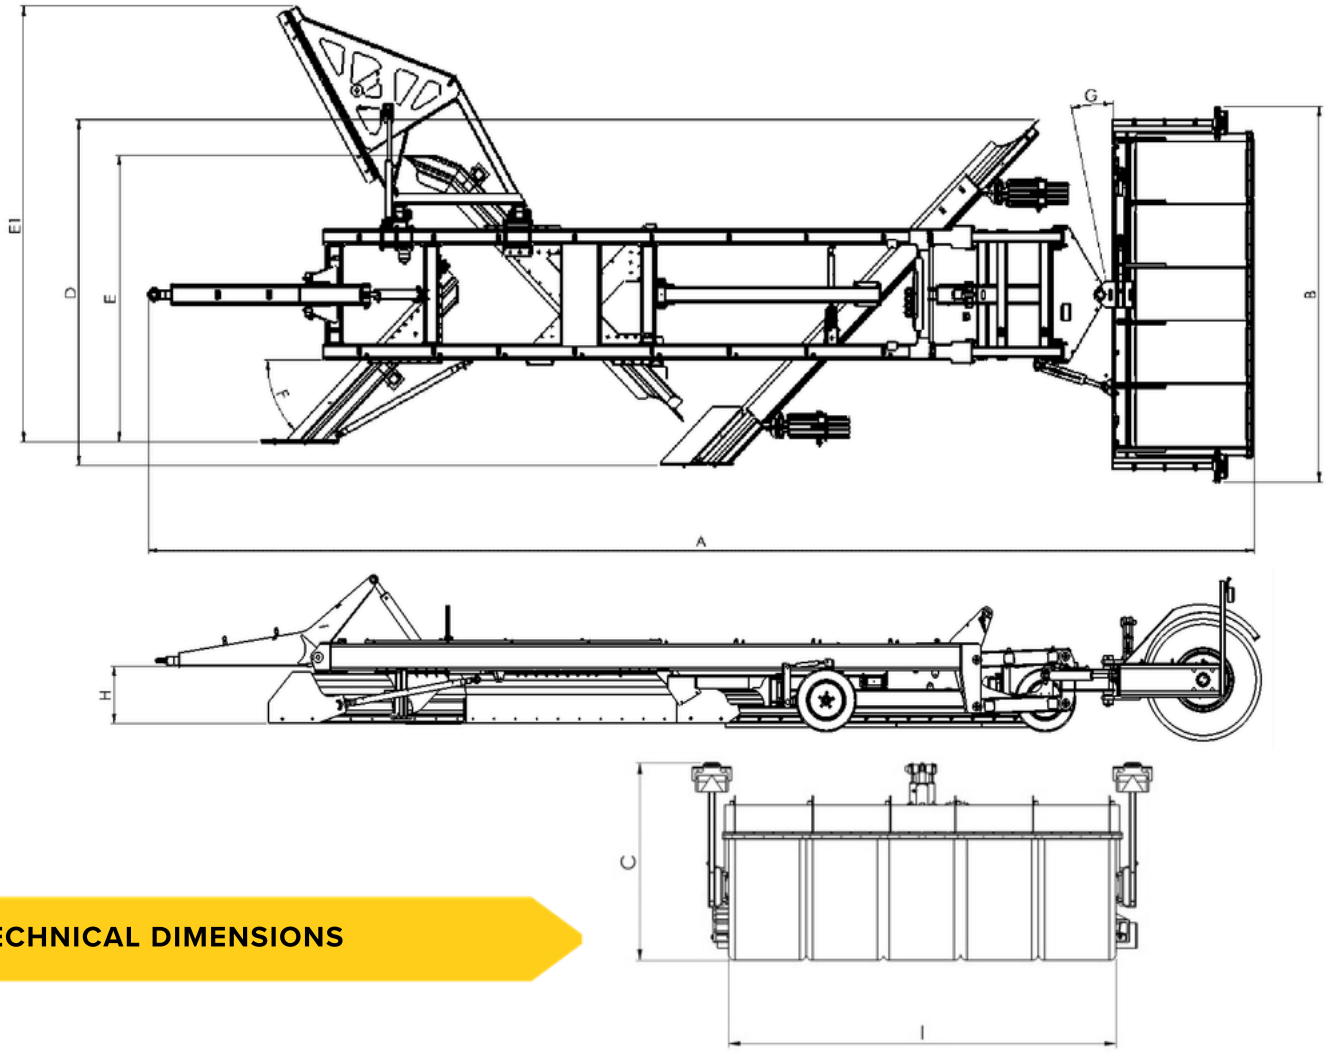

TECHNICAL DIMENSIONS

Product	Max. length (mm)	Max. width (mm)	Height (mm)	Working width (mm)	Working width, main blade (mm)	Max. working width, side wing (mm)	Blade angle ±(°)	Turning angle ± (°)	Height of wing (mm)	Rear packer width (mm)	Angle of tilt ± (°)	Weight (kg) *
	A	B	C	D	E	E1	F	G	H	I		
RD 4.5	8800	2900	1300	2700	2300	3200	45	15	470	2600	12	4500
RD 6	10800	3500	1600	3300	2800	4100	45	12	550	3100	12	6000

* NOTE! Weight varies depending on the type of attachment / brush equipment.
**Available with a flow restrictor if output exceeds 120 l/min.

2026•1 ametal Oy reserves the full rights to change at any time without ogligation providing equipment , prices and technical solutions , without prior notice.