STARK
STRONGLY CHOSEN
SINCE 1980

STARK RELAX V - PLOW for over 6 t machines

SNOW PLOWING

- **Patented RELAX blade release mechanism protects the driver, machine, and equipment.**
- **The safest and most versatile articulated plow on the market.**
- **The strongest choice for clearing driveways and roads—highly versatile.**



- With the STARK RELAX articulated plow, you can efficiently clear roads, light traffic paths, forest roads, and yard areas. Thanks to its patented blade release, it is also suitable for removing hard-packed snow.
- The strong construction and unique details, such as reinforced wing edges, ensure worry-free plowing for kilometers.
- The curved wing and 25° blade angle provide excellent snow-throwing performance, and the plow is easy to push.
- The 38° pivot angle allows snow to rise onto the wing even at low speeds.
- The advanced FLOATING FRAME suspension ensures a smooth plowing result and easy maintenance.
- Bolted edge wear plates allow plowing against curb stones.
- The bolt-mounted STARK FIT adapter is quickly interchangeable.
- A four-function valve adds efficiency to the articulated plow's operation.



STANDARD EQUIPMENT


- LED light kit
- Road equipment package: Large snow rubber in its own stand and additional throwing wings
- Snow rubber on the front edges of the wings
- 360° rotating ball-jointed skid shoes
- Edge wear plates


ACCESSORIES


- Control unit

RELAX STARK FIT FLOATING FRAME

TECHNICAL DRAWINGS

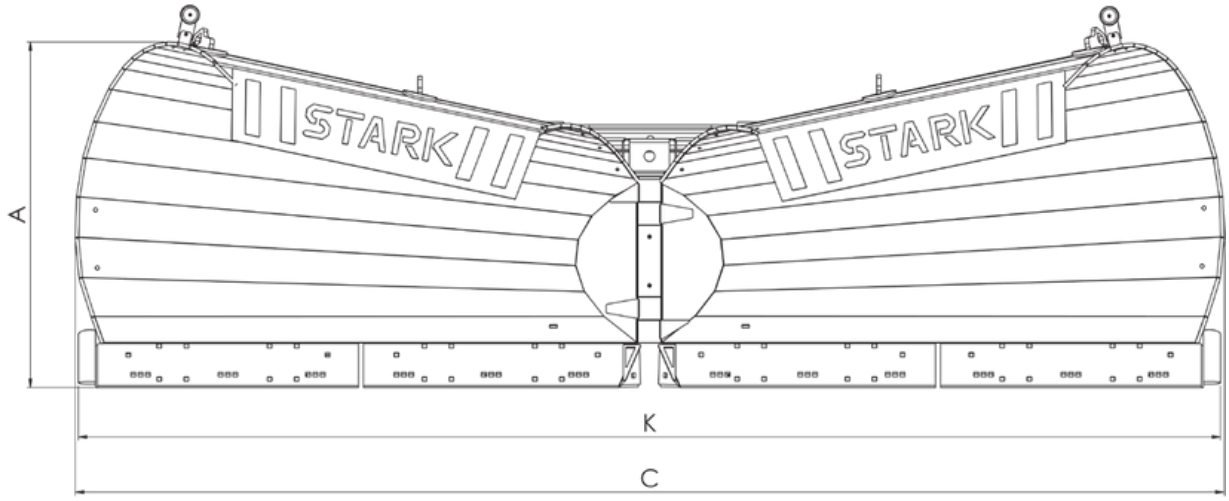

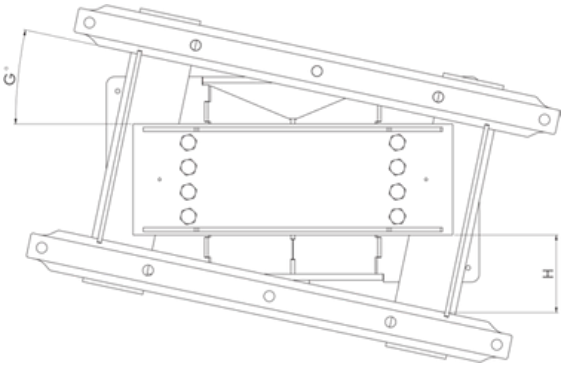

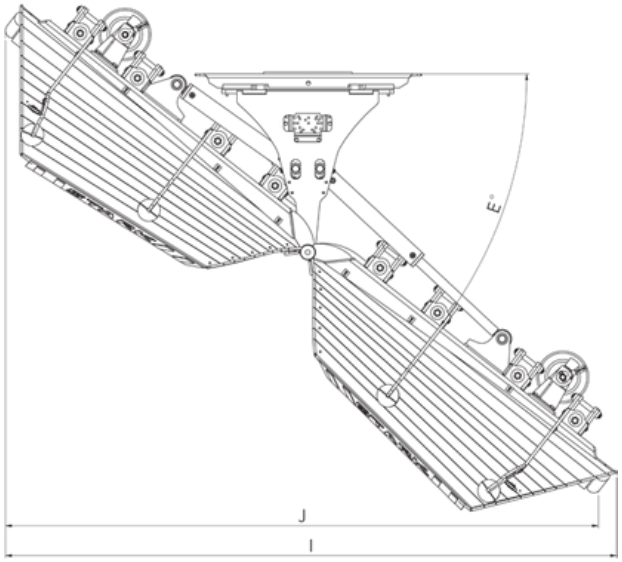

TECHNICAL DIMENSIONS

Product	Max. wing height (mm)	Min. wing height (mm)	Wing width (mm)	Distance from adapter (mm)	Pivot angle (°)	Blade angle (°)	Float (°)	Float height (mm)	Min. width at pivot angle (mm)	Min. working width at pivot angle (mm)	Blade length (mm)	Weight (kg) *
	A	B	C	D	E	F	G	H	I	J	K	
V 3300 R	1165	920	3300	1050	38	25	12	190	2700	2600	3295	1210
V 3600 R	1200	920	3550	1060	38	25	12	190	2890	2795	3530	1260
V 4000 R	1220	920	4000	1090	38	25	12	190	3270	3120	3985	1335

*** Weight includes blades and fittings. Weight depends on the fitting type / plow accessories**

2026•3 Lametal Oy reserves the right to change equipment levels, prices and technical solutions at any time without obligation and without prior notice.